



Pebble Time Battery Replacement

Removal of battery for replacement.

Written By: Nicolas Hempe



INTRODUCTION

Removal of battery for replacement.



TOOLS:

- [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Screwdriver, J000 Phillips Head](#) (1)
-

Step 1 — Screen Cover




- Lay the watch flat on your workstation.

Step 2



- Use the metal spudger to carefully pull apart the screen cover from the case.
- Replace the metal spudger with a plastic opening tool to hold the cover open.

Step 3

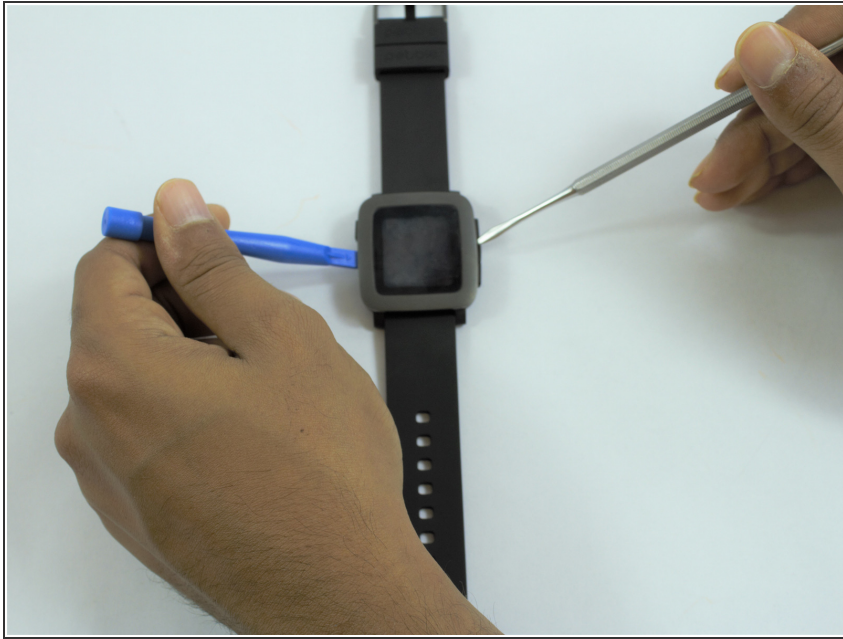

- Use the metal spudger tool to carefully loosen the rest of the cover.

Step 4



- Carefully, pull apart the cover with the plastic opening tool.

Step 5 — Screen




- Insert metal spudger into the side of the screen shown in the picture.

Step 6



- Use the metal spudger to pry the screen up.

Step 7

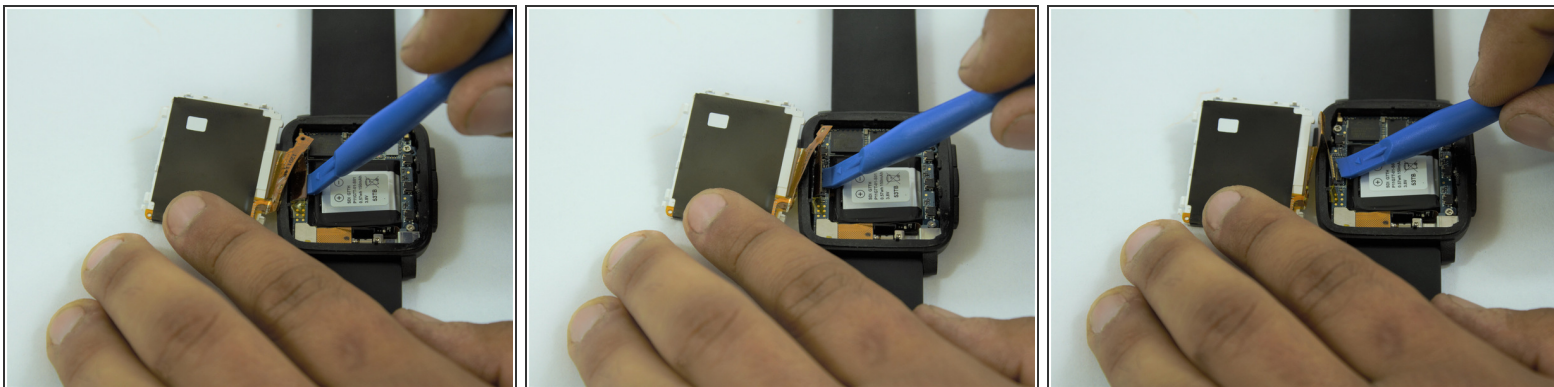

- Once screen is lifted, insert plastic opening tool between the screen connector and circuit board.
- Disconnect the screen from the circuit board.

Step 8 — Circuit Board




- Keep the watch flat on your workstation.

Step 9




- Locate the three screws on the circuit board.
- Remove using the J000 Philips head screwdriver.

Step 10

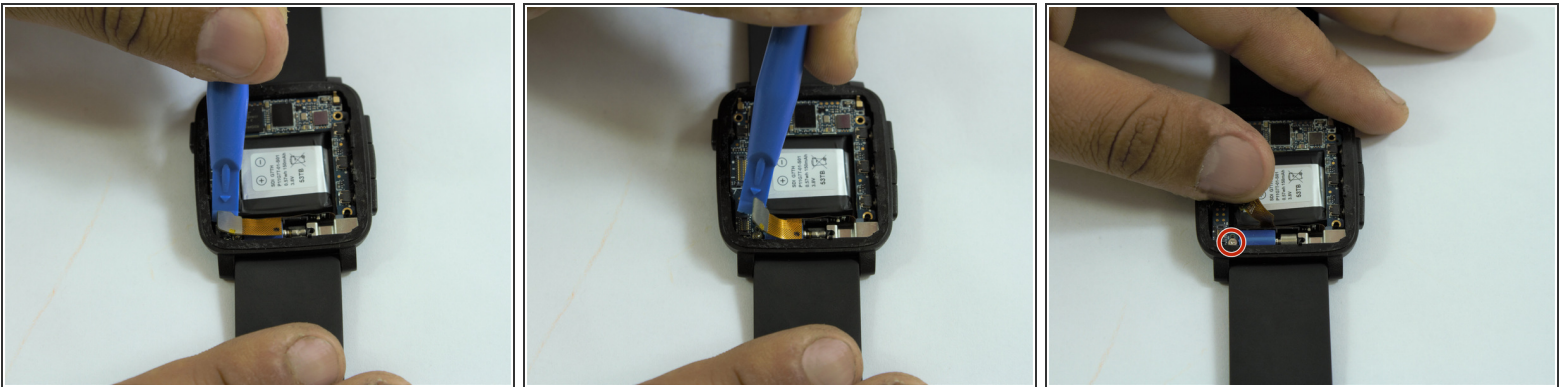



- Carefully disconnect the connector wire on the bottom left edge of the circuit board using a plastic opener tool.
- Move apart the connector to expose the fourth screw.

Step 11

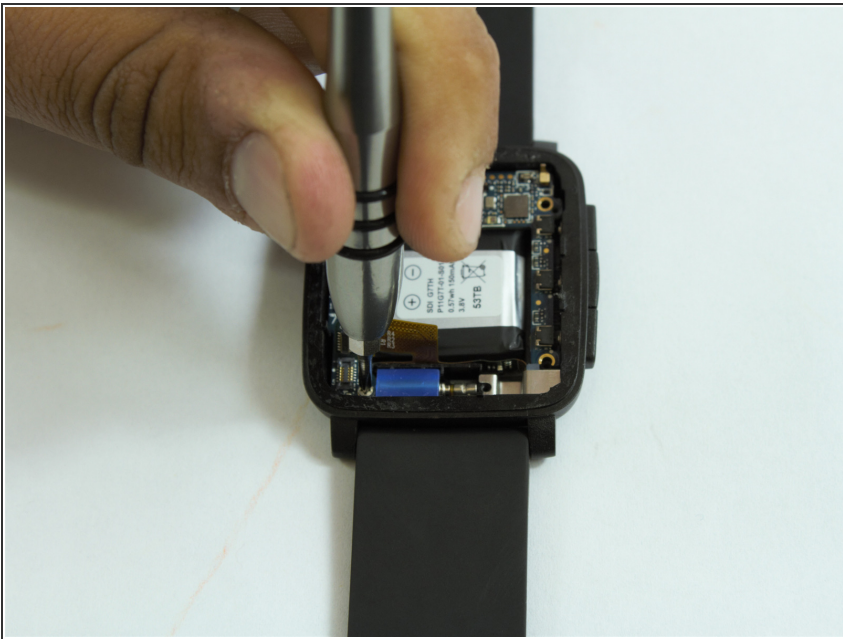

- Remove the final screw from the circuit board with a J000 Philips head screwdriver.

Step 12

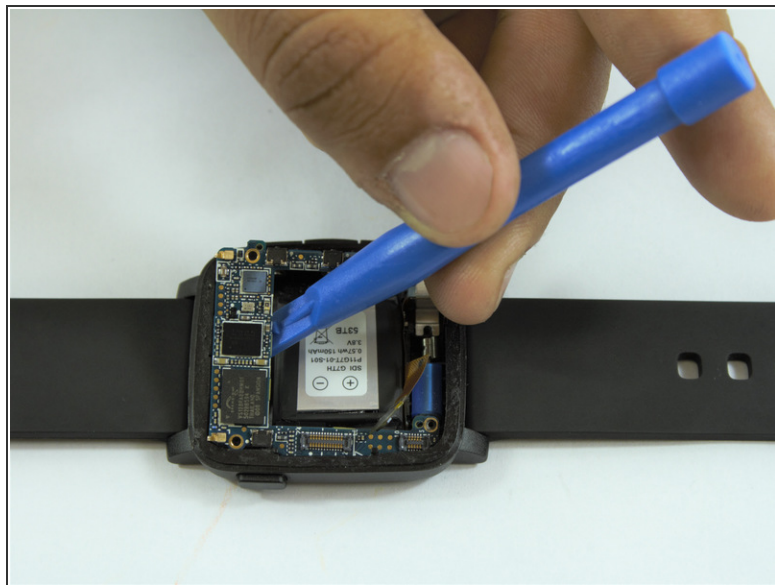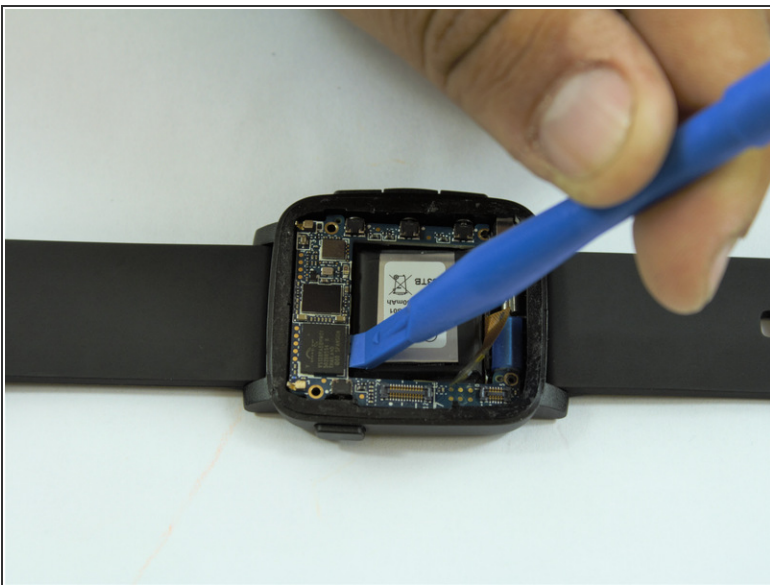



- Turn the watch to the side and use the plastic opening tool to lift up the circuit board.
- Remove the circuit board from the case.

Step 13 — Battery



- After removing the circuit board, the battery is located in the middle of the case.

Step 14

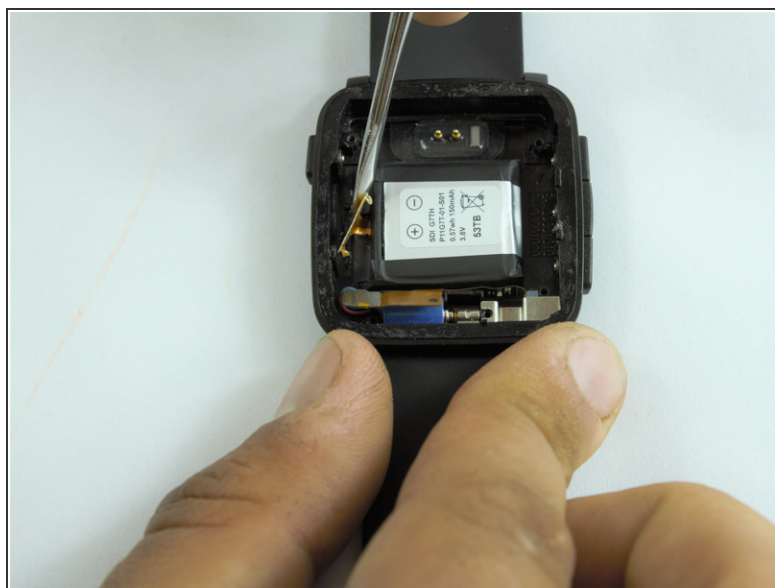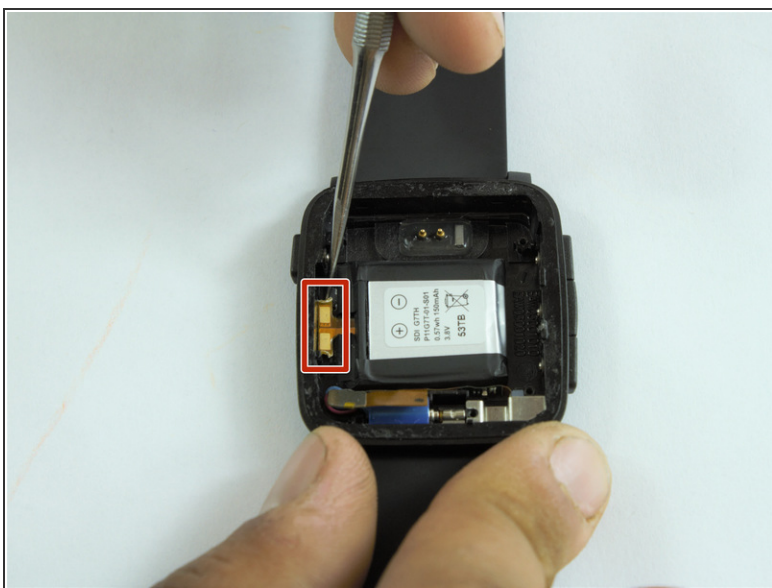

- Locate the battery connector on the left side of the case.
- Carefully disconnect the wire using a metal spudger.

Step 15



- After disconnecting the battery use the plastic opening tool to lift the battery off of the case.

 There battery might be glued to the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-29 06:41:14 PM.